


## Wall saw WZ

Cutting depths up to 710 mm



Wall saw head constructed from high-strength aluminium base alloy, gear swivel arm and roller guides

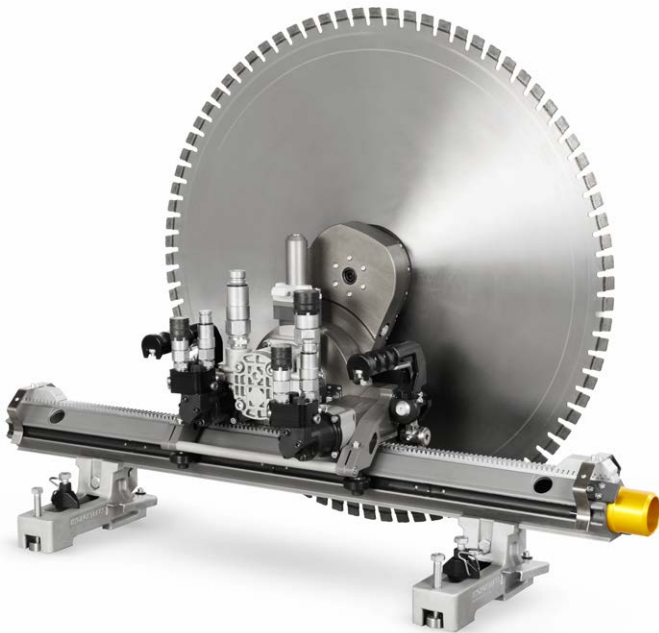

Gear swivel arm with quick separation flange mounting



Wall saw head can be mounted quickly and easily

Use of the quick-separation flange on the swivel arm provides simple, fast blade replacement and facilitates use in flush cutting applications. Innovative feed motors ensure fast

cutting. With the WZ in conjunction with hydraulic drives with outputs of up to 25 kW, blade diameters of up to maximum 1 600 mm can be used.

# System & Accessories

## Technical data

Saw blade	
Max. cutting depth	710 mm
Max. saw blade Ø	1 600 mm
Free detachable up to Ø	825 mm
Blade flange mounting	Quick-release flange
Saw blade fixing (flush cuts)	6 countersunk head screws, 130 mm graduated circle

## Design

GR2 hydraulic motor with quick-change device	
Swivel arm, can be rotated by 360°	
Power transmission in swivel arm via gear wheel	
Carriage guided by rollers	

## Weight

incl. drive motor and 2 feed motors	29 kg
with 2 feed motors only	24 kg

## System & Accessories

Wall saw system WZ	
10982000	Wall saw WZ
10977627	Motor complete WZ 22 ccm / FD
10984100	Blade guard 1 000 mm 3 pcs. AIO
10982079	VAS G Track   1 100 mm   alu
10981818	VAS G Track   2 200 mm   alu
965987	V-Track feet alu, flat
965987	V-Track feet alu, flat
965987	V-Track feet alu, flat
977495	Pressure relief valve FD
10977996	Tool box

## Accessories

10977882	Blade flange ST compl.
10984099	Blade guard 800 mm 3 pcs. AIO
10984100	Blade guard 1 000 mm 3 pcs. AIO
10984101	Blade guard 1 200 mm 3 pcs. AIO
977606	Blade guard 1 600 mm 2 pcs.
977334	Blade guard holder 2 pcs. for bolt

## Hydraulic drive motors – size 2

10977625	Motor complete WZ 16 ccm / FD
10977626	Motor complete WZ 18 ccm / FD
10977627	Motor complete WZ 22 ccm / FD
10977628	Motor complete WZ 26 ccm / FD
10978079	Motor complete WZ 30 ccm / FD
976163	Motor complete B/S 30 ccm / FD
973892	Quick-change set for motors size 2
965987	V-Track feet alu, flat
961983	V-Swivel track feet
10977452	V-Rotrary rail support compl.